


Steel wire rope veropower 8

Product information



Wire rope construction: veropower 8 is a rotary swaged 8-strand, non-rotation-resistant rope in parallel lay construction with compacted outerstrands and a rope core covered with a plastic layer. It provides the highest breaking strength of all non rotation-resistant wire ropes and offers superior resistance to drum crushing.

Features:

- All strands are compacted and rotary swaged.
- Extremely high breaking strength and is very resistant against abrasion.
- Suitable for multi layer spooling systems with guided loads.
- Fully lubricated

ISO 4309

Rope Category No: Up to 40mm **RCN.09**, 41-46mm **RCN.11**, > 46mm **RCN.13**.


Marking: According to standard

Standard: EN 12385-4


Warning: veropower 8 may not be used with a swivel.

RCN: 09

Tolerance Ø: +2% to +4%

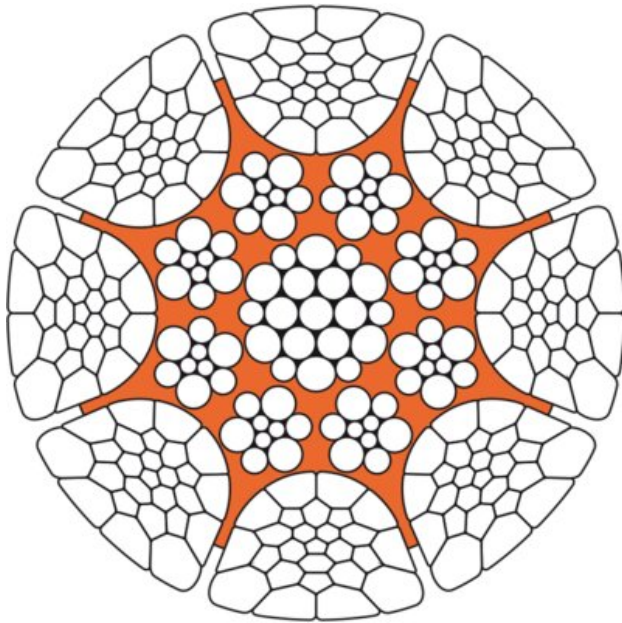

Overhead cranes



Mobile port crane



Offshore crane



Loading crane



Crawler crane



Container crane



Piling crane



Tower crane



Ladle crane



103103004070279	30	-	-	-	-	-	-	-	-	-
103103104070279	31	-	-	-	-	-	-	-	-	-
103103204070279	32	-	-	-	-	-	-	-	-	-
103103304070279	33	-	-	-	-	-	-	-	-	-
103103404070279	34	-	-	-	-	-	-	-	-	-
103103504070279	35	-	-	-	-	-	-	-	-	-
103103604070279	36	-	-	-	-	-	-	-	-	-
103103804070279	38	-	-	-	-	-	-	-	-	-
103104004070279	40	-	-	-	-	-	-	-	-	-
103104204070279	42	-	-	-	-	-	-	-	-	-
103104404070279	44	-	-	-	-	-	-	-	-	-
103104504070279	45	-	-	-	-	-	-	-	-	-
103104604070279	46	-	-	-	-	-	-	-	-	-
103104804070279	48	-	-	-	-	-	-	-	-	-

Technical data