


## WINPRO flex 300 Chain PC/B standard delivery length

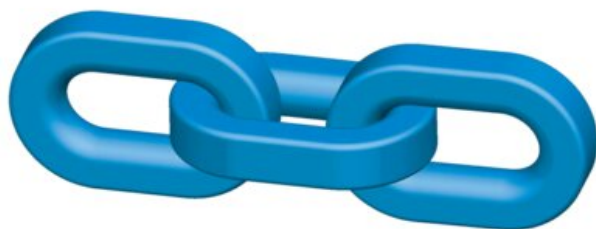

### Product information

Specially rugged profile chain in grade 12 for lifting.

**Material:** Alloy steel grade 12

**Marking:** Every link is marked with manufacturer ID and grade

**Temperature range:** -60°C to 300°C

**Finish:** Light blue powdercoated

**Note:** Not to be heat-treated

**Grade:** 12

Part Code	Chain diameter mm	WLL ton	Min. Breaking force kN.	Length m	Outside width mm	D mm	E mm	H mm	Weight kg	Delivery time
204100700500020	7	2.36	92.6	50	26	7	22	10	1.36	17
204100800500020	8	3	118	50	29	8	25	11	1.64	17
204101000500020	10	5	196	50	37	10	33	14	2.7	17
204101300500020	13	8	314	50	50	13	41	19	4.8	17
204101600250020	16	12.5	491	25	60	16	51	23	7.17	17

# Blueprint

